



## A7-80(90)S Series

## 80~90 Watts Switching Adapter

### FEATURES

- Active PFC
- CEC Efficiency Regulations Compliance
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 480g only
- Efficiency 85%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Operating Temperature 0~35°C



### SPECIFICATION

Model	A7-80S12R	A7-90S12R	A7-90S17R
Item			
Output Voltage	12~17V	12~17V	17~24V
Output Rating	80W Max	90W Max	90W Max
Input Voltage	AC 90~264V		
Input Frequency	47~63Hz		
Input Current	2.0A Maximum		
Inrush Current	100A Maximum		
Line Regulation	2% Maximum		
Load Regulation	±5%		
Ripple & Noise	1% Maximum		
Efficiency	82~87% Typical		
Temperature Coefficient	0.05%/°C		
Over-Voltage Protection	Auto Recovery		
Short-circuit Protection	Auto Recovery		
Operating Temperature	0~35°C		
Storage Temperature	-20~85°C		
Safety	Pending		
EMC (EMI/EMS)	Pending		

(\*): Under Development (I/P): In Process (Pending): Pending


Above specification is for reference only, please contact for details.

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>




## ORDERING INFORMATION

A7-80S12-V-2A

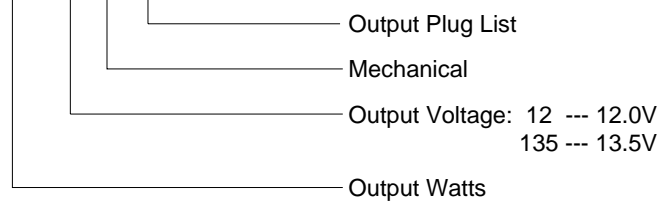

## MECHANICAL

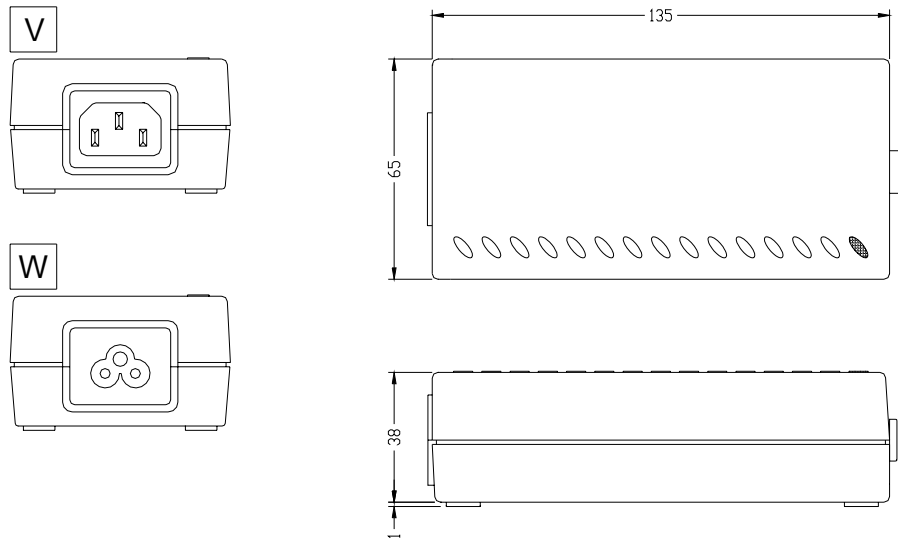

Unit: m.m.

Standard Output Cable:  
16AWG, UL 1571, 1200mm

<b>Tel:+86-20-81628973</b>	<b>Fax:+86-20-81628967</b>
<b>e-mail:sales@ceetus.com.cn</b>	<b>Website:www.ceetus.com.cn</b>